



DeWALT is a market-leading manufacturer of premium power tools, accessories and anchors and fixings that provides a fully integrated system solution for various applications.

DeWALT tools offer unparalleled performance, with durable construction for a professional finish. Rely on DeWALT to get the job done, with a 3 year guarantee on most tools.



Taking cordless drilling to the next level, the newest DeWALT 54V XR FLEXVOLT range provides true corded performance without the restrictions of the cord. With Brushless motors and Perform & Protect low vibration levels, these tools set the new standard on the jobsite.

With over 100 tools in the range the 18V XR Lithium-Ion battery platform is the biggest and fastest growing in our range. All 18V XR products are compatible with XR FLEXVOLT batteries, giving you longer runtime and even greater flexibility meaning the CORDLESS JOBSITE has arrived.



## TAKE YOUR WORKSHOP ANYWHERE.



### GUARANTEED TOUGH.®

Every one of our products are tested at length by genuine construction professionals, ensuring they never let a user down. Under the most demanding jobsite conditions, DeWALT tools earn the right to be labelled Guaranteed Tough® – in the hands of real users.

### PERFORM & PROTECT



Tools carrying the Perform and Protect shield are designed to exceed the highest demands of the jobsite whilst meeting strict criteria in key health and safety issues:

- CONTROL – unique and innovative torque features help to protect the end user from accidental jams
- VIBRATION – integrated vibration dampening systems allow users to operate tools safer for longer
- DUST – advanced dust control guards against dust inhalation, helping to create a cleaner, safer working environment



## 54V XR POWER WHERE YOU NEED IT

Take the power of mains wherever you go with the XR FLEXVOLT range. The 54V batteries offer immense, consistent power to make light work of the toughest applications.

[www.DEWALT.co.uk](http://www.DEWALT.co.uk)

**54V XR FLEXVOLT 190MM CIRCULAR SAW**

**DCS575T2**

Blade Diameter	190 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut (90°)	67mm
Max. Depth of Cut (45°)	49mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s <sup>2</sup>



**DCS575N - BARE UNIT**

**54V XR FLEXVOLT 190MM TRACKED CIRCULAR SAW**

**DCS576T2**

Blade Diameter	190 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut (90°)	61mm
Max. Depth of Cut (90°) with Rail	57mm
Max. Depth of Cut (45°)	43mm
Max. Depth of Cut (45°) with Rail	39mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s <sup>2</sup>
Track Compatible	Yes



**DCS576N - BARE UNIT**

**54V XR FLEXVOLT 190MM HIGH TORQUE CIRCULAR SAW**

**DCS577T2**

Blade Diameter	190 x Diamond Bore
No Load Speed	5800rpm
Max. Depth of Cut (90°)	65mm
Max. Depth of Cut (45°)	50mm
Bevel Capacity	53°
Hand/Arm Vibration	2.5m/s <sup>2</sup>



**DCS577N - BARE UNIT**

**300MM DUAL PORT RIPPING FENCE FOR DCS577 HIGH TORQUE CIRCULAR SAW**

**DWS5100-XJ**

Rip Capacity Left Side	300mm
Rip Capacity Right Side	360mm
Folds Down To	485mm x 76mm



**54V XR FLEXVOLT PLUNGE SAW**

**DCS520T2**

Blade Diameter	165 x 20mm
No Load Speed	2500 - 4200rpm
Max. Depth of Cut (90°)	59mm
Max. Depth of Cut (90°) with Rail	55mm
Max. Depth of Cut (45°)	44mm
Max. Depth of Cut (45°) with Rail	40mm
Bevel Capacity	47°



**DCS520NT - BARE UNIT IN TSTAK™**

**54V XR FLEXVOLT RECIPROCATING SAW**

**DCS388T2**

No Load Stroke Rate	0 - 3000spm
Stroke Length	28.6mm
Max. Cutting Capacity Timber	300mm
Max. Cutting Capacity Metal Profiles	130mm
Max. Cutting Capacity Plastic Tubes	160mm
Hand/Arm Vibration - Cutting Boards	12.5m/s <sup>2</sup>



**DCS388N - BARE UNIT**

**54V XR FLEXVOLT 190MM HIGH TORQUE CIRCULAR SAW**

**DCS690X2**



Blade Diameter	230 x 22.2mm
No Load Speed	6600rpm
Max. Depth of Cut	83mm
Hand/Arm Vibration	4.2m/s <sup>2</sup>
Sound Pressure	103.6 dB(A)
Sound Power	114.6 dB(A)
No. of Rotatable Guard Positions	5
Adjustable Dual Sided Water Delivery System	Yes
Heavy Load Indicator	Yes
Latched Battery Box	Yes



**DCS690N (EXCLUDES BLADE)**

**54V XR FLEXVOLT 216MM MITRE SAW**

**DCS777T2**



Blade Diameter	216 x 30mm
No Load Speed	6300rpm
Max. Cutting Capacity (90°/90°)	270 x 62mm
Max. Cutting Capacity (90°/45°)	270 x 48mm
Max. Cutting Capacity (45°/45°)	190 x 48mm
Bevel Capacity	48°
Mitre Capacity	50°/50°



**DCS777N - BARE UNIT**

**54V XR FLEXVOLT 250MM MITRE SAW**

**DCS778T2**



Blade Diameter	250 x 30mm
No Load Speed	4300rpm
Max. Cutting Capacity (90°/90°)	305 x 85mm
Max. Cutting Capacity (90°/45°)	215 x 85mm
Max. Cutting Capacity (45°/45°)	215 x 58mm
Bevel Capacity	48°
Mitre Capacity (Right/Left)	50°/50°



**DCS778N - BARE UNIT**

**2 X 54V XR FLEXVOLT 305MM MITRE SAW**

**DHS780T2**



Blade Diameter	305 x 30mm
No Load Speed	3800rpm
Max. Cutting Capacity (90°/90°)	303 x 110mm
Max. Cutting Capacity (90°/45°)	211 x 76mm
Max. Cutting Capacity (45°/45°)	268 x 44mm
Max. Cutting Capacity (45°/90°)	305 x 56mm
Mitre Capacity (Right/Left)	60°/50°
Bevel Capacity (Right/Left)	49°/49°



**DHS780N - BARE UNIT DCB500-GB 240V MAINS ADAPTER DCB500-LX 110V MAINS ADAPTER**

**54V XR FLEXVOLT TABLE SAW**

**DCS7485T2**



Blade Diameter	210 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut (90°)	65mm
Max. Depth of Cut (45°)	45mm
Bevel Capacity	-3 to 48°
Rip Capacity (Right)	610mm
Rip Capacity (Left)	318mm



**DCS7485N - BARE UNIT**

**54V XR FLEXVOLT SDS PLUS 3-MODE HAMMER DRILL**

**DCH333X2**



No Load Speed	0 - 1000rpm
Max. Drilling Capacity Concrete	30mm
Hand/Arm Vibration - drilling into Concrete	7.5m/s <sup>2</sup>
Blows Per Minute	0 - 4480bpm
Impact Energy	3.5J



**DCH333NT - BARE UNIT IN TSTAK™**

**54V XR FLEXVOLT SDS PLUS 3-MODE HAMMER DRILL**

**DCH334X2**



No Load Speed	0 - 1000rpm
Max. Drilling Capacity Concrete	30mm
Hand/Arm Vibration - drilling into Concrete	7.5m/s <sup>2</sup>
Blows Per Minute	0 - 4480bpm
Impact Energy	3.5J



**DCH334N - BARE UNIT**

**54V XR FLEXVOLT SDS MAX 3-MODE HAMMER DRILL**

**DCH481X2**



No Load Speed	0 - 540rpm
Max. Drilling Capacity Concrete	40mm
Hand/Arm Vibration - drilling into Concrete	9.4m/s <sup>2</sup>
Blows Per Minute	0 - 3150bpm
Impact Energy	6.1J



**DCH481N - BARE UNIT**

**54V XR FLEXVOLT 48MM 8KG SDS MAX COMBINATION HAMMER**

**DCH733X2**



Max. Drilling Capacity Concrete	48mm
Max. Drilling Capacity Core Bit	125mm
Impact Energy	13.3J
No Load Speed	177-355rpm
Blows Per Minute	1350-2705bpm
Hand/Arm Vibration - hammer drilling into Concrete	9m/s <sup>2</sup>
Hand/Arm Vibration - chiselling	8.8m/s <sup>2</sup>
Sound Pressure	97dB(A)
Sound Power	108dB(A)
Category	8Kg



**DCH733N - BARE UNIT**

**54V XR FLEXVOLT 52MM 10KG SDS-MAX ROTARY HAMMER**

**DCH773Y2**



Max. Drilling Capacity Concrete	52mm
Max. Drilling Capacity Core Bit	150mm
Impact Energy	19.4J
No Load Speed	145-290rpm
Blows Per Minute	1,105 - 2,210bpm
Hand/Arm Vibration - hammer drilling into Concrete	10.1m/s <sup>2</sup>
Hand/Arm Vibration - chiselling	9.4m/s <sup>2</sup>
Sound Pressure	96dB(A)
Sound Power	107dB(A)
Category	10Kg



**DCH773N - BARE UNIT**

**54V XR FLEXVOLT ANGLE GRINDER**

**DCG414T2**



No Load Speed	9000rpm
Hand/Arm Vibration - Grinding	5.9m/s <sup>2</sup>
Max. Disc Diameter	125mm
Spindle Thread	M14



**DCG414N - BARE UNIT**

**54V XR FLEXVOLT ALLIGATOR SAW**

**DCS397T2**



Blade Length	430mm
No Load Stroke Rate	2400spm
Hand/Arm Vibration - Concrete	4.1m/s <sup>2</sup>
Stroke Length	40mm
Blade Stop	0.2sec
Includes TCT Class 12 Blade	

Class 20 blade suitable for Poroton and Building Blocks available separately (DT2976-QZ)



**DCS397N - BARE UNIT**

**54V XR FLEXVOLT SPLIT SHAFT STRING TRIMMER**

**DCM5713X1**

Line Diameter	7.5m x 2.0mm
Cutting Speed	0-5100rpm/0-5500rpm
Cutting Width/Swathe	38cm
Brush Cutter	No
Sound Power Level	94dB(A)



**DCM5713N BARE UNIT DT20658 SPOOL & 2MM X 8.0M LINE DT20652-QZ LINE 2.5M X 68.6M**

**DT20656-QZ CAP, SPOOL & LINE DT20653-QZ BRUSH CUTTER TRI BLADE**

**DT20654-QZ BRUSH CUTTER STRAIGHT BLADE DT20655-QZ BRUSH CUTTER 4T BLADE**

**54V XR FLEXVOLT TRIMMER & BRUSHCUTTER**

**DCM571X1**

Line Diameter	7.5m x 2.0mm
Cutting Speed	0-5100rpm/0-5600rpm
Cutting Width/Swathe	38cm
Brush Cutter	Yes
Sound Power Level	94dB(A)



**DCM571N - BARE UNIT DT20652-QZ LINE 2.5M X 68.6M DT20656-QZ CAP, SPOOL & LINE**

**DT20653-QZ BRUSH CUTTER TRI BLADE DT20654-QZ BRUSH CUTTER STRAIGHT BLADE**

**DT20655-QZ BRUSH CUTTER 4T BLADE**

**54V XR FLEXVOLT 40CM CHAINSAW**

**DCM575X1**

Bar and Chain Length	40cm
Chain Speed	15m/s
Chain Brake	< 1sec
Variable Speed	Yes
Chain Tensioning	Tool Free
Sound Power Level	100.5dB(A)



Tree Surgeon's License is NOT required to operate this machine



**DCM575N - BARE UNIT DT20660-QZ BAR DT20662-QZ OIL DT20663-QZ 40CM REPLACEMENT CHAIN**

**DT20661-QZ 46CM BAR DT20664-QZ 46CM REPLACEMENT CHAIN**

**54V XR FLEXVOLT COMPRESSOR**

**DCC1054T2**

Tank Size	10L
Power	0.3kW/0.4HP
Pump Type	Oil-free
Max. Pressure	9.3Bar
Free Air Delivery	31 l/min @ 7Bar
Noise LPa 1sd	79dBA
Weight	11kg
18GA Brad Nails per Charge	1220 on 1x 6.0Ah
Regulator Type	OneTurn™



**DCC1054N - BARE UNIT**

**54V XR FLEXVOLT DUAL HANDLE PADDLE MIXER**

**DCD240X2**

No Load Speed	225/350/475/600/725rpm
Hand/Arm Vibration	<2.5m/s <sup>2</sup>
Power Output	2000W
Max. Capacity	160mm
Ramp Up/Down Speed	2.5 secs
Spindle thread	m14
Battery Cover	Yes



**DCD240N - BARE UNIT**

Includes Centre Pull Down Swirl Paddle (550 x 200mm)

**54V XR FLEXVOLT M-CLASS DUST EXTRACTOR**

**DCV586MT2**



Extraction Classification	M-Class
Tank Capacity	11L
Wet/Dry	Yes
Hose length	2.5m
Hose Connection	AIRLOCK
Hose Diameter	32mm
Blower	No



**DCV586N - BARE UNIT**

**DUST EXTRACTOR ACCESSORIES**



DCV9401-XJ	Paper Bags for DCV586M Dust Extractor (5 Pack)
DCV9402-XJ	Cloth Bags for DCV586M Dust Extractor (5 Pack)
DCV5861-XJ	M-Class Filters for DCV586M Dust Extractor (Set of 2)



\*HEPA Certified

**54V XR FLEXVOLT RIGHT ANGLE/DIAMOND CORE DRILL**

**DCD470N**



Power Output	2600UWO
Max. Torque	269Nm
Chuck Capacity	16mm Keyed
No. of Speeds	2
E-Clutch	Yes
No. Load Speed	0-400/0-1320rpm
Max. Drilling (Aerated Concrete)	152mm
Max. Drilling (Brick)	127mm
Max. Drilling (Wood with Holesaw)	158mm



**MAINS ADAPTERS**

**DCB500-GB DCB500-LX**



DCB500-GB	240V Mains Adapter For 2 x 54V XR FLEXVOLT 305mm Mitre Saw
DCB500-LX	110V Mains Adapter For 2 x 54V XR FLEXVOLT 305mm Mitre Saw



**6.0AH XR FLEXVOLT 18/54V BATTERY PACK**

**DCB546**



Voltage	18/54V
Battery	18V 6Ah XR FLEXVOLT
Length	125mm
Width	85mm
Height	90mm



**9.0AH XR FLEXVOLT 18/54V BATTERY PACK**

**DCB547**



Voltage	18/54V
Battery	18V 9Ah XR FLEXVOLT
Length	138mm
Width	87mm
Height	97mm



**12.0AH XR FLEXVOLT 18/54V BATTERY PACK**

**DCB548**



Voltage	18/54V
Battery	18V 12Ah XR FLEXVOLT
Length	138mm
Width	87mm
Height	97mm



**XR FAST CHARGER**

**DCB118**



Power Voltage Supply	240V
Battery Compatibility	18/54V
Charging Current	4A/8A
Charging Time (6.0Ah)	60mins



**XR DUAL CHARGER**

**DCB132**



Power Voltage Supply	240V
Battery Compatibility	12/14.4/18/54V
Charging Current (Single/Dual)	4A/2 x 4A



**18V XR 4 PORT FAST CHARGER**


**DCB104**



Power Voltage Supply	240V or 110V
Battery Compatibility	12/18/54V
Charging Current	8A
Charging Time (6Ah/9Ah/12Ah)	60/85 & 75**/100mins
** Battery Date Code 201811475B or later	



AVAILABLE IN 240V OR 100V

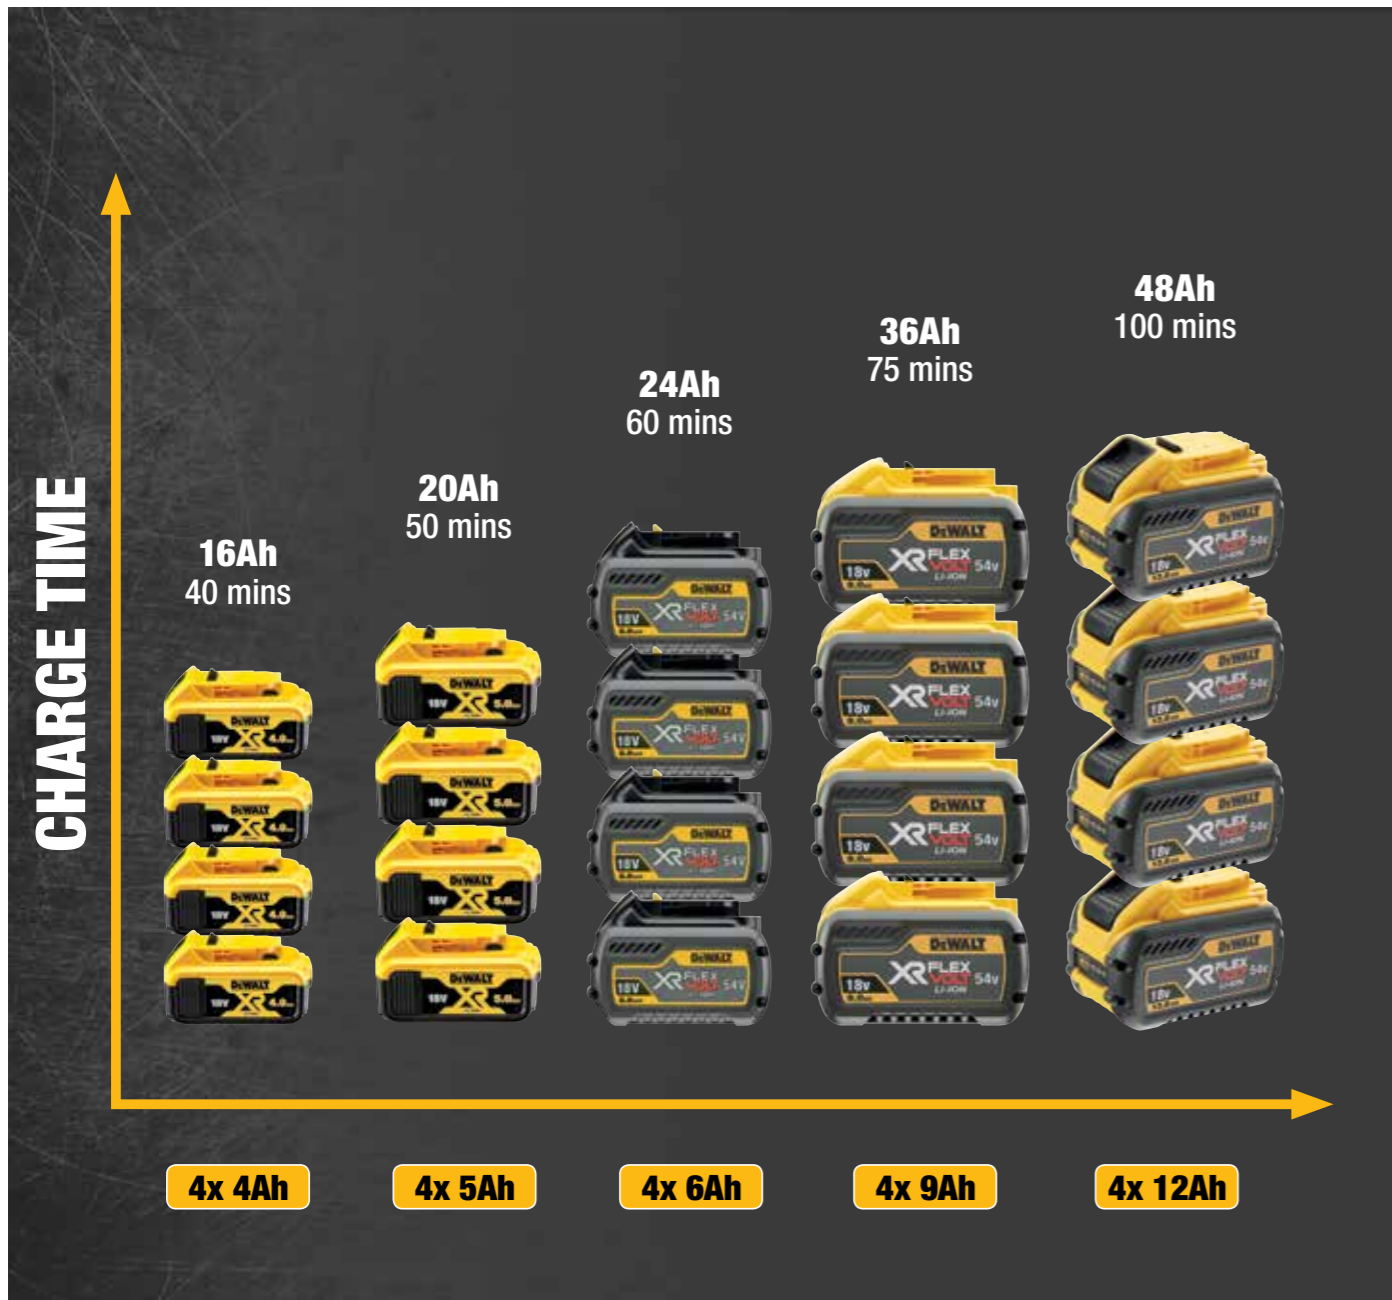

# BATTERY CHARGE TIMES



	DCB107	DCB113	DCB115	DCB118	DCB132	DCB119	DCB104
<b>DCB546</b>	270 Minutes	140 Minutes	90 Minutes	60 Minutes	90 Minutes	180 Minutes	60 Minutes
<b>DCB547</b>	420 Minutes	220 Minutes	140 / 135** Minutes	85 / 75** Minutes	140 / 135** Minutes	270 Minutes	85 / 75** Minutes
<b>DCB548</b>	540 Minutes	300 Minutes	180 Minutes	100 Minutes	180 Minutes	-	100 Minutes
<b>DCB181</b>	70 Minutes	35 Minutes	22 Minutes	22 Minutes	22 Minutes	45 Minutes	-
<b>DCB182</b>	185 Minutes	100 Minutes	60 Minutes	60 Minutes	140 / 135** Minutes	120 Minutes	40* / 60 Minutes
<b>DCB183/B</b>	90 Minutes	50 Minutes	30 Minutes	30 Minutes	30 Minutes	60 Minutes	22 Minutes
<b>DCB184/B</b>	240 Minutes	120 Minutes	75 Minutes	75 Minutes	75 Minutes	150 Minutes	50* / 75 Minutes
<b>DCB185</b>	60 Minutes	30 Minutes	22 Minutes	22 Minutes	22 Minutes	40 Minutes	22 Minutes
<b>DCB187</b>	140 Minutes	70 Minutes	45 Minutes	45 Minutes	45 Minutes	90 Minutes	45 Minutes
<b>DCB144</b>	240 Minutes	120 Minutes	75 Minutes	-	75 Minutes	150 Minutes	-
<b>DCB145</b>	60 Minutes	30 Minutes	22 Minutes	-	22 Minutes	40 Minutes	-
<b>DCB125</b>	60 Minutes	30 Minutes	22 Minutes	-	22 Minutes	40 Minutes	22 Minutes
<b>DCB127</b>	90 Minutes	50 Minutes	30 Minutes	-	30 Minutes	60 Minutes	-

# 12 AH



## GUARANTEED TOUGH.®

\* Battery date code 201536 or later

\*\* Date code 201811475B or later



**54V XR FLEXVOLT GRINDER AND 18V XR HAMMER DRILL TWIN KIT**

**DCK2055T2T**



- Kit Includes:  
 DCD996 Premium Hammer Drill Driver  
 DCG414 54V Angle Grinder  
 DCB546 2 x 54V Flexvolt Batteries  
 DCB118 Fast Charger  
 TSTAK™ Compatible and TSTAK™ II Kit Boxes



**DCD240N - BARE UNIT**

**54V XR FLEXVOLT CIRCULAR SAW AND 18V XR HAMMER DRILL TWIN KIT**

**DCK2056T2T**



- Kit Includes:  
 DCD996 Premium Hammer Drill Driver  
 DCS575 54V Circ Saw  
 DCB546 2 x 54V Flexvolt Batteries  
 DCB118 Fast Charger  
 TSTAK™ compatible and TSTAK™ VI kit boxes



**54V XR FLEXVOLT RECIP SAW AND 18V XR HAMMER DRILL TWIN KIT**

**DCK2057T2T**



- Kit Includes:  
 DCD996 Premium Hammer Drill Driver  
 DCS575 54V Recip Saw  
 DCB546 2 x 54V Flexvolt Batteries  
 DCB118 Fast Charger  
 TSTAK™ compatible and TSTAK™ II kit boxes

